

Threaded plugs

Resistant up to 100 °C, Aluminium

SPECIFICATION

Identification no.

- No. **1**: without vent hole
- No. **2**: with vent hole

Aluminium

plastic coated

black, RAL 9005, matte finish **SW**

blank **BL**

tumbled

temperature resistant up to **100 °C**

Sealing ring rubber NBR (Perbunan)



INFORMATION

Threaded plugs GN 441 with the external diameter d_1 match the screw-in holes for DIN 3852 pipe bolt connections.


The sealing ring is embedded in a radial recess on the plane side, which makes the sealing ring captive and cannot be squeezed out during tightening. The sealing is also relatively soft, enhancing the sealing effect also on uneven surfaces.

ON REQUEST

- Threaded plugs with dipstick

TECHNICAL INFORMATION

- Elastomer characteristics (see page A32)

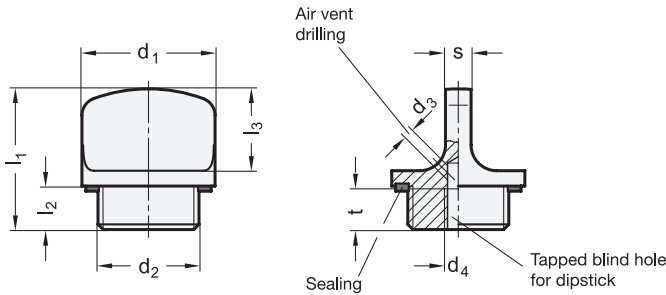

* Complete with colour index of the Threaded plugs

SW RAL9005
BL blank

GN 441

Description	d_1	d_2	d_3	d_4	$l_1 \pm 0.5$	l_2	l_3	s	t min.	$\frac{t}{d_1}$
GN 441-22-M16x1,5-1-*	22	M 16 x 1,5	-	M 5	26	8	15	5	8	12
GN 441-22-M16x1,5-2-*	22	M 16 x 1,5	2	M 5	26	8	15	5	8	12
GN 441-26-M20x1,5-1-*	26	M 20 x 1,5	-	M 5	27,5	8,5	16	5	8	17
GN 441-26-M20x1,5-2-*	26	M 20 x 1,5	2	M 5	27,5	8,5	16	5	8	17
GN 441-32-M26x1,5-1-*	32	M 26 x 1,5	-	M 5	29	9	17	6	8	27
GN 441-32-M26x1,5-2-*	32	M 26 x 1,5	2	M 5	29	9	17	6	8	27
GN 441-22-G3/8-1-*	22	G 3/8	-	M 5	26	8	15	5	8	12
GN 441-22-G3/8-2-*	22	G 3/8	2	M 5	26	8	15	5	8	12
GN 441-26-G1/2-1-*	26	G 1/2	-	M 5	27,5	8,5	16	5	8	17
GN 441-26-G1/2-2-*	26	G 1/2	2	M 5	27,5	8,5	16	5	8	17
GN 441-32-G3/4-1-*	32	G 3/4	-	M 5	29	9	17	6	8	27
GN 441-32-G3/4-2-*	32	G 3/4	2	M 5	29	9	17	6	8	27
GN 441-40-G1-1-*	40	G 1	-	M 5	32,5	11	18	7	8	48
GN 441-40-G1-2-*	40	G 1	2	M 5	32,5	11	18	7	8	48

Weight colour SW