

Flanged connector clamps

Aluminium / Stainless Steel, with 2 mounting holes

SPECIFICATION

Identification No.

No. **2**: with Stainless Steel-Clamping screw DIN 912

Version in Aluminium

plastic coated
black, RAL 9005, textured finish **SW**

blank
matt shot-blasted **BL**

Version in Stainless Steel NI

AISI CF-8
matt shot-blasted

Clamping bores mechanically machined

Socket cap screw DIN 912

Stainless Steel AISI 304

Hexagon nuts DIN 985

Stainless Steel AISI 304



INFORMATION

The clamping bores of GN 145 flanged connector clamps are mechanically machined and designed for construction tubes GN 990 (see page 1902) or DIN 2391, DIN 2395 and DIN 2462 respectively.

GN 145 flanged connector clamps are also suitable for mounting on **profile systems**.

The standard version of the clamping screw is a socket cap screw with hexagonal socket DIN 912. It can be replaced by a clamping kits GN 911 (see page 1874) / GN 911.3 (see page 1875) (article code see table of dimensions).

ACCESSORY


- Clamping kits GN 911 (see page 1874) / GN 911.3 (see page 1875) (article code see table of dimensions).

TECHNICAL INFORMATION

- Stainless Steel characteristics (see page A26)

* Complete with colour index of the Flanged connector clamps (SW or BL)

SW **BL**
RAL9005 blank

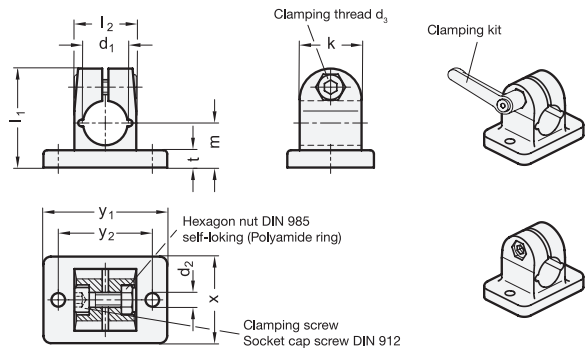

GN 145

Description	d1	d2	d3	k	l1	l2	m	t	x	y1	y2	Clamping kits for d3
GN 145-B10-2-*	B 10	5.5	M 6	25	40	25	18	7	35	50	38	GN 911-M6-22
GN 145-B12-2-*	B 12	5.5	M 6	25	40	25	18	7	35	50	38	GN 911-M6-22
GN 145-B14-2-*	B 14	5.5	M 6	25	40	25	18	7	35	50	38	GN 911-M6-22
GN 145-B15-2-*	B 15	5.5	M 6	25	40	25	18	7	35	50	38	GN 911-M6-22
GN 145-B16-2-*	B 16	5.5	M 6	25	40	25	18	7	35	50	38	GN 911-M6-22
GN 145-B18-2-*	B 18	5.5	M 6	25	40	25	18	7	35	50	38	GN 911-M6-22

Weight BL

GN 145-NI

STAINLESS STEEL

Description	d1	d2	d3	k	l1	l2	m	t	x	y1	y2	Clamping kits for d3	⚖
GN 145-B12-2-NI	B 12	5.5	M 6	25	40	25	18	7	35	50	38	GN 911.3-M6-22	180
GN 145-B14-2-NI	B 14	5.5	M 6	25	40	25	18	7	35	50	38	GN 911.3-M6-22	170
GN 145-B15-2-NI	B 15	5.5	M 6	25	40	25	18	7	35	50	38	GN 911.3-M6-22	170
GN 145-B16-2-NI	B 16	5.5	M 6	25	40	25	18	7	35	50	38	GN 911.3-M6-22	164
GN 145-B18-2-NI	B 18	5.5	M 6	25	40	25	18	7	35	50	38	GN 911.3-M6-22	159
GN 145-B20-2-NI	B 20	5.5	M 6	25	40	25	18	7	35	50	38	GN 911.3-M6-22	153

