

## Base plate connector clamps

Aluminium / Stainless Steel, with 4 mounting holes

### SPECIFICATION

#### Identification No.

No. **2**: with Stainless Steel-Clamping screw DIN 912

#### Version in Aluminium

plastic coated  
black, RAL 9005, textured finish **SW**

blank  
matt shot-blasted **BL**

#### Version in Stainless Steel NI

AISI CF-8  
matt shot-blasted

Clamping bores mechanically machined

Socket cap screws DIN 912  
Stainless Steel AISI 304

Hexagon nuts DIN 985  
Stainless Steel AISI 304



### INFORMATION


Clamping bores of the base plate clamps GN 162 are mechanically machined and designed for construction tubes GN 990 (see page 1902) or DIN 2391, DIN 2395 and DIN 2462 respectively. The standard version of the clamping screw is a socket cap screw with hexagonal socket DIN 912. It can be replaced by a clamping kits GN 911 (see page 1874) / GN 911.3 (see page 1875) (article code see table of dimensions).

### ACCESSORY

- Clamping kits GN 911 (see page 1874) / GN 911.3 (see page 1875)

### TECHNICAL INFORMATION

- Stainless Steel characteristics (see page A26)

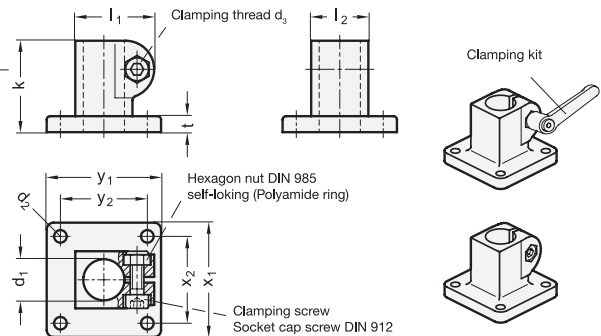

\* Complete with colour index of the Base plate connector clamps (SW or BL)

**SW**  
RAL9005

**BL**  
blank

### GN 162

Description	d1	d2	d3	k	l1	l2	t	x1	x2	y1	y2	Clamping kits for d3
GN 162-B10-2-*	B 10	5.5	M 6	40	34.5	25	7	50	38	50	38	GN 911-M6-22
GN 162-B12-2-*	B 12	5.5	M 6	40	34.5	25	7	50	38	50	38	GN 911-M6-22
GN 162-B14-2-*	B 14	5.5	M 6	40	34.5	25	7	50	38	50	38	GN 911-M6-22
GN 162-B15-2-*	B 15	5.5	M 6	40	34.5	25	7	50	38	50	38	GN 911-M6-22
GN 162-B16-2-*	B 16	5.5	M 6	40	34.5	25	7	50	38	50	38	GN 911-M6-22
GN 162-B18-2-*	B 18	5.5	M 6	40	34.5	25	7	50	38	50	38	GN 911-M6-22

Weight BL

### GN 162-NI

**STAINLESS STEEL**

Description	d1	d2	d3	k	l1	l2	t	x1	x2	y1	y2	Clamping kits for d3	⚖
GN 162-B12-2-NI	B 12	5.5	M 6	40	34.5	25	7	50	38	50	38	GN 911.3-M6-22	238
GN 162-B14-2-NI	B 14	5.5	M 6	40	34.5	25	7	50	38	50	38	GN 911.3-M6-22	227
GN 162-B15-2-NI	B 15	5.5	M 6	40	34.5	25	7	50	38	50	38	GN 911.3-M6-22	213
GN 162-B16-2-NI	B 16	5.5	M 6	40	34.5	25	7	50	38	50	38	GN 911.3-M6-22	207
GN 162-B18-2-NI	B 18	5.5	M 6	40	34.5	25	7	50	38	50	38	GN 911.3-M6-22	200
GN 162-B20-2-NI	B 20	5.5	M 6	40	34.5	25	7	50	38	50	38	GN 911.3-M6-22	180

